



**NEW FLUX RECOVERY EQUIPMENT MOUNTS  
DIRECTLY ONTO LINCOLN ELECTRIC'S  
"CRUISER" WELDING TRACTOR.**

**ALT-2-C  
APT-2-C  
XP-3TRAC-C**

**TO SEE ALL OUR PRODUCTS, VISIT US AT OUR  
WEB SITE : [WELDENGEERING.COM](http://WELDENGEERING.COM)**

**INTRODUCING ALT-2-C, APT-2-C, AND XP-3TRAC-C STANDARD DUTY FLUX RECOVERY EQUIPMENT THAT MOUNTS DIRECTLY ONTO LINCOLN'S "CRUISER" WELDING TRACTOR.**



**APT-2-C**

THE AIR-POWERED APT-2-C IS RUGGED AND POWERFUL. ADDS NO OIL OR WATER TO THE FLUX BECAUSE VACUUM AIR PUMP IS ON EXHAUST SIDE.


- **APT-2-C Input Power:**  
Shop Air 70-100 psi @ 8 cfm.
- **APT-2-C Capacity:**  
Approx. 18 lbs (8.2 kg)
- **APT-2-C Dimensions:**  
32" (81.3 cm) H  
X 19-1/2" (49.6 cm) W  
X 12-15/16" (32.9 cm) D
- **APT-2-C Weight:**  
15 lbs (6.8 kg)



**XP-3TRAC-C**

**XP-3TRAC-C  
WHILE WELDING  
IN THE 45°  
FILLET WELD  
POSITION**

**NOTE:**  
ALL FLUX VACS  
CAN MOUNT IN  
THE VERTICAL  
OR 45° FILLET  
WELDING  
POSITION.

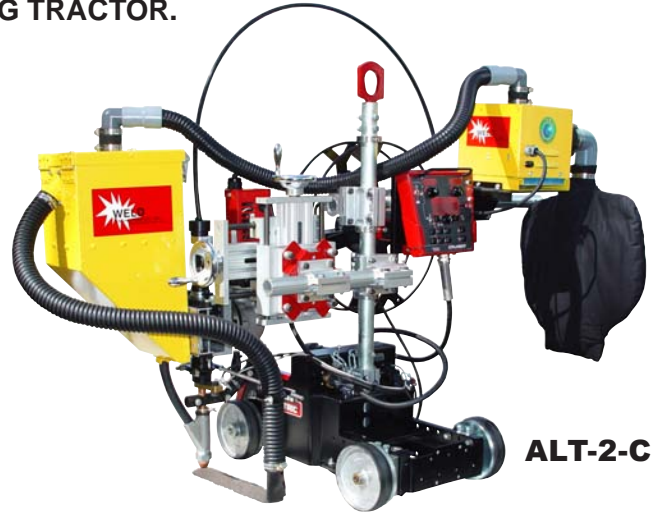

**ALT-2-C**

THE ALT-2-C COMES WITH A POWERFUL 1.9 HP ELECTRIC VACUUM AND A SELF-CLEANING DUST AND FINES FILTER.

- **ALT-2-C Input Power:** 115V or 220V / 1ph / 60-50HZ
- **ALT-2-C Capacity:** Approx. 18 lbs (8.2 kg)
- **ALT-2-C Dimensions:**  
Hopper/Separator: 24-3/32" (61.2 cm) H X  
11-11/16" (29.7 cm) W X 14-3/4" (37.5 cm) D  
Vacuum Power Source: 12-1/16" (30.7 cm) H X  
8-3/4" (22.3 cm) W X 13-1/16" (33.2 cm) D
- **ALT-2-C Weight:** Hopper/Separator: 16 lbs (7.3 kg)  
Vacuum Power Source: 13 lbs (5.9 kg)

THE AIR-POWERED XP-3TRAC-C IS LIGHT-WEIGHT AND COMPACT WHERE SIZE AND WEIGHT ARE IMPORTANT FACTORS.

- **XP-3TRAC-C Input Air:** Clean and dry air @ 70-100psi @ 8 cfm.
- **XP-3TRAC-C Capacity:** Approx. 18 lbs (8.2 kg)
- **XP-3TRAC-C Dimensions:** 20-1/32" (50.9 cm) H X  
25-5/32" (63.9 cm) W X 8-1/2" (21.6 cm) D
- **XP-3TRAC-C Weight:** 15 lbs (6.8 kg)

**WELD**  
ENGINEERING CO., INC.

34 Fruit St.  
Shrewsbury, MA 01545 (U.S.A.)  
Telephone: (508) 842-2224  
Fax: (508) 842- 3893  
Web Site: [weldengineering.com](http://weldengineering.com)  
Email: [sales@weldengineering.com](mailto:sales@weldengineering.com)